

DHS140-45-1Q Series-Pneumatic-electrcial Slip Ring

DHS140-45-1Q Description:

DHS140-45-1Q product with 1 pneumatic channels,G1/8 inch,with 45 signal channels ,suitable for rotating application,working speed 100rpm.

DHS140-45-1Q Customized Options:

- ◆Cable length
- ◆Number of channels
- ◆Signal Type
- ◆Number of gas passage
- ◆Shell Material
- ◆Working medium



Typical Application:


Industrial robots - spray robots used on assembly lines need to use gas-electric slip rings to receive instructions from the control system while obtaining sufficient compressed air to ensure normal spraying operations.

Medical devices - During endoscopic examinations, in order to maintain image quality and protect sensitive components from the internal environment, designs with gas-electric combined slip rings

are often used to ensure that all necessary power and air sources can be safely and effectively transmitted to the probe part

Wind power generation - the variable pitch control system on the top of the tower must rely on gas-electric combined slip rings to maintain an unobstructed communication link with the ground, and also ensure that the appropriate amount of hydraulic oil or compressed air can be supplied to the corresponding actuators in a timely manner.

DHS140-45-1Q Standard Drawing :

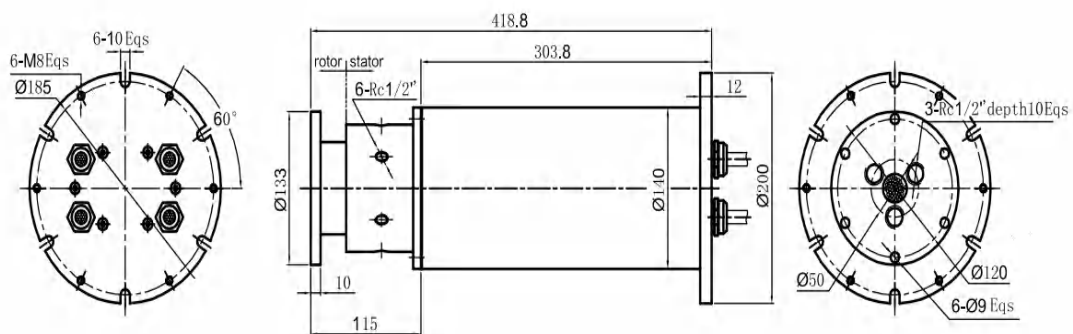

DHS140-45-1Q Technical Parameters:

Pneumatic Channel Parameters			
No of Channels	1 Ring or Custom		
Interface Thread	G 1/8"		
Flow Hole	Air inlet $\Phi 16$, Air outlet $\Phi 10$		
Medium	Compressed air		
Working Pressure	1Mpa		
Working Speed	≤ 200 rpm		
Working temperature	$-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$		
Electrical technical		Mechanical technical	
No of Channels	45	Speed range	0-100rpm
Rated Current	10A	Protection level	IP65
Rated Voltage	0-440VAC/240VDC	Structural material	Aluminum alloy
Contact resistance variation	$< 10\text{m}\Omega$	Working humidity	$< 70\%$
Insulation resistance	$\geq 1000\text{M}\Omega@1000\text{VDC}$	Electrical contact material	Previous metal
Electrical strength	1000VAC@50Hz,60s,1mA	Lead specification	2A-AFP 2*0.15mm ²
Working temperature	$-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$	Lead length	500mm+20mm