

## HS-1F-001 Series---Fiber Optic Slip Ring

### HS-1F-001 Description:

HS-1F-001 product with 1 fiber optic channels, bandwidth  $\pm 100\text{nm}$ , suitable for rotating application, working wavelength 650-1550nm.

### HS-1F-001 Customized Options:


- ◆ Various fiber sizes and patch cord lengths
- ◆ Fiber types
- ◆ Fiber connectors
- ◆ Fiber lengths
- ◆ Number of fiber channels

### Typical Application:

High-end robots, high-end material conveying systems, rotating turrets on military vehicles, remote control systems, radar antennas, fiber optic sensors and other turntables (rate tables) for high-speed video, digital, and analog signal transmission and control, medical systems, video surveillance systems, submarine operation systems to ensure national or international security systems, emergency lighting equipment, robots, exhibition/display equipment, medical equipment, etc.



## HS-1F-001 Standard Drawing :

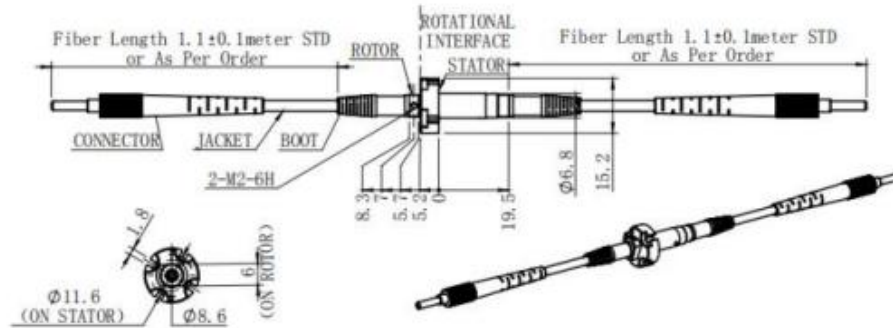

## HS-1F-001 Technical Parameters:

Technical Parameters			
Fiber Optic technical		Mechanical technical	
Parameters	Value	Parameters	Value
Number of rings	1 Ring or Custom	Withstand tension	≤12N
Bandwidth	±100nm	Maximum speed	2000rpm
Wavelength range	650 ~ 1550nm	Estimated life	> 200 million rpm
Maximum insertion loss	< 1.5dB	Working temperature	-20 ~ + 60°C
Insertion loss fluctuation	< 0.5dB	Storage temperature	-45 ~ 85°C
Return loss	≥30dB	Weight	15g
Withstand power	≤23dBm	Vibration and shock standard	GBJ150
Fiber Type	9/125 Single Mode	Protection level	IP54 (IP65 ,IP67 Option)