

# LHS115-4Y Series---Hydraulic Rotary Joint

### **LHS115-4Y Description:**

LHS115-4Y product with 2 Hydraulic Oil Channels, OD 115 mm, suitable for rotating application, interface thread G1/2", support 0-6 channels

### LHS035-2Q Customized Options:


- ◆Number of electrical, gas and liquid circuits
- ◆Cable length
- ♦Number of channels
- ◆Working medium and working pressure of gas and liquid circuits
- ♦Wire length, connection terminals
- ◆Shell material and color
- ◆Protection level
- ◆Rated speed

#### **Typical Application:**

Various non-standard automation equipment, lithium battery equipment, mobile phone testing equipment, high-end mobile phone equipment, various laser equipment, coating machines, diaphragm coating equipment, packaging film equipment for soft-pack batteries, bonding equipment, laminating equipment, electronic semiconductor industry automation equipment; optoelectronic flat panel display (LCD/LCM/TP/OLED/PDP) industrial automation equipment, testing equipment, other non-standard automation professional equipment, etc.



# LHS035-2Q Standard Drawing:

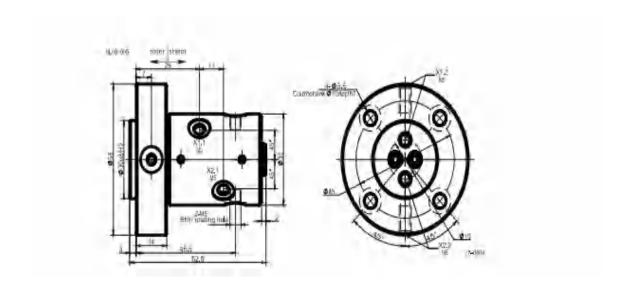

## **LHS035-2Q Technical Parameters:**

Rotary Joint Technical Parameter	
No of Channel	2 Way or Custom
Interface Thread	M5
Flow Hole	Φ4
Medium	Compressed Air
Pressure	1.1Mpa
Rotating Speed	≤200rpm
Temperature	-30°C-+80°C